
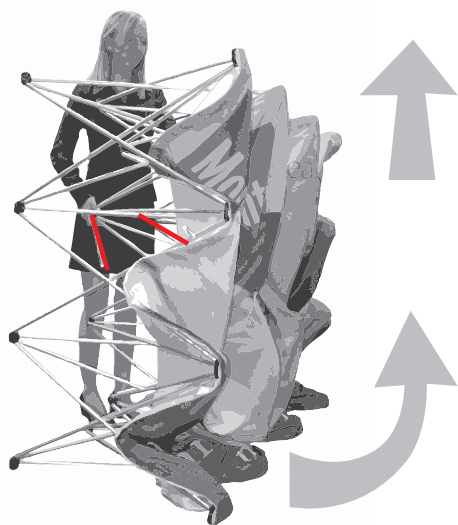


# BURST! SL

## Set-up Instructions

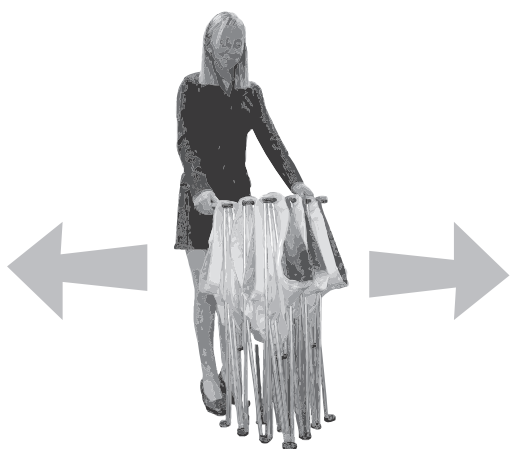

1. Remove display from bag or case.

2. With graphic at top and off floor spread display open until it is about knee high. Graphic is now parallel to the floor.

3. Determine top of graphic and rotate display upward so graphic is now perpendicular to the floor.

4. Lift upward and spread out the frame. The SL (Self Locking) frame will lock open with little effort.

5. With your display now standing look inside the frame for two red bars connected to the back plane of the frame. Rotate these red bars toward the front plane of the frame. The end of the bar will lock into the hub of the frame on the front plane. These red bars are not required but help make the graphic smooth/taut.