


Using Your Setup Instructions

The Standing Sign Setup Instructions are created specifically for your configuration. They include an exploded view of the frame which is sequentially numbered. We encourage you to study the instruction before attempting to assemble your exhibit.


Connections are kept very simple: no tools for frame, 7/32 allen wrench for base plates. Everything assembles with push-button connectors and pre-connected horizontal sections.


Cleaning and Packing Your Display


- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.

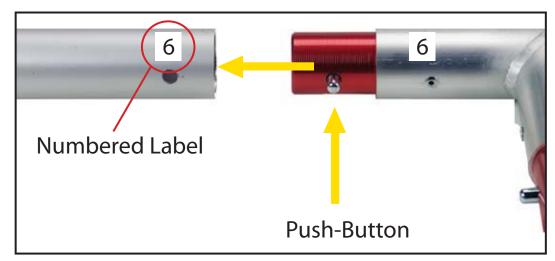

Connections are made by holding the button down and sliding the red tube into opposing tube until the connection is made. To disassemble push button and pull or twist extrusions apart.

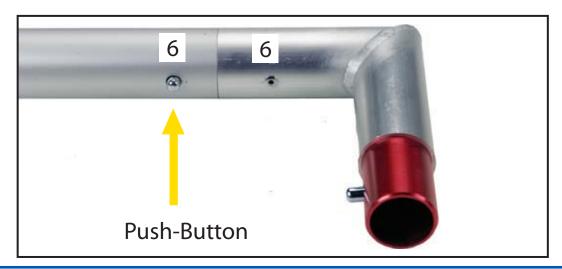

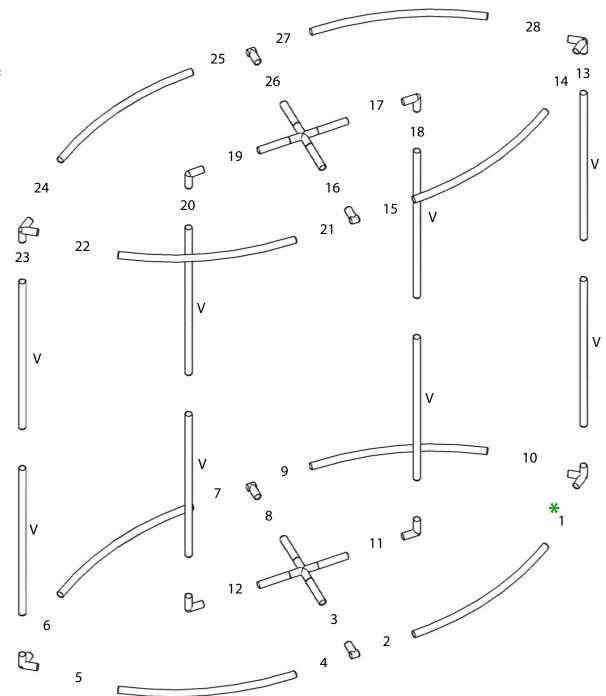



Steps:

1) Connect pieces together in numerical order.

Next, add lights then graphics. (See back)

6" Link Cord (6)

LIGHTING DIAGRAM

Steps: Lights clip to frame as shown. Install cords according to color key. Color Key: Power Cord (1) 36" Link Cord (1)

GRAPHIC INSTALLATION



Slightly tip frame forward.
Slip graphic onto top of frame.



4) Tip frame back to upright position.



6) Finish bringing graphic down frame.



3) Slip graphic approximately 1/3 of the way down the frame.



5) Slide graphic down frame.



7) Align graphic to frame.



8) Velcro along bottom of frame.